Inertial Labs
a VIAVI Solutions company



MEMS Inertial Measurement Unit Digital Tilt Sensor

KERNEL-100

Datasheet

The **Inertial Labs MEMS KERNEL Inertial Measurement Units & Digital Tilt Sensors** are the latest addition to the Inertial Labs Advanced Miniature MEMS sensor-based family. Revolutionary due to its very compact, self-contained strapdown, industrial-grade Inertial Measurement Systems that measures linear accelerations and angular rates with three-axis MEMS accelerometers and three-axis MEMS gyroscopes. Angular rates and accelerations are determined with low noise and very good repeatability for both motionless and dynamic applications.



The **Inertial Labs KERNEL-100** is the breakthrough, fully integrated inertial solution that combines the latest MEMS sensor technologies. Fully calibrated, temperature compensated, mathematically aligned to an orthogonal coordinate system, the IMU contains up to 2 deg/hr Bias in-run stability gyroscopes and 0.01 mg Bias in-run stability accelerometers with very low noise and high reliability.

Continuous Built-in Test (BIT), configurable communications protocols and flexible input power requirements make the **Inertial Labs KERNEL** easy to use in a wide range of higher order integrated system applications.







The **Inertial Labs KERNEL** models were designed for applications, like:

- Autonomous vehicles
- Antenna and Line of Sight Stabilization Systems
- Passengers trains acceleration / deceleration and jerking systems
- Motion Reference Units (MRU) and Motion Control Sensors (MCS)
- Gimbals, EOC/IR, platforms orientation and stabilization
- GPS-Aided Inertial Navigation Systems (INS)
- Attitude and Heading Reference Systems (AHRS)
- Land vehicles navigation and motion analysis
- Buoy or Racing Boat Motion Monitoring
- UAV & AUV/ROV navigation and control

Parameter	KERNEL-100
GYROSCOPES	
Measurement range	±2000 deg/sec
Gyroscopes Bias in-run stability	2 deg/hr
Gyroscopes Bias instability (over temperature range)	72 deg/hr
Gyroscopes Noise - Angular Random Walk	0.38 deg/√hr
ACCELEROMETERS	
Measurement range	±8 g
Accelerometers Bias in-run stability	0.01 mg
Accelerometers Bias instability (over temperature range)	0.7 mg
Accelerometers Noise - Velocity Random Walk	0.02 m/sec/√hr
PITCH & ROLL ACCURACY	0.05 deg

	Parameter	Units	KERNEL-100	
GENERAL	Output signals		Pitch, Roll, Accelerations, Angular Rates, Temperature, Synch	
	Color of Enclosure		Black	
	Update rate (IMU data)	Hz	2000	
	Update rate (Pitch & Roll data)	Hz	2000	
	Start-up time	sec	<0.02	
	Full Accuracy Data (Warm-up Time)	sec	<0.05	
	Latency	milli sec	<1	
	Pitch & Roll	**Units**		
PERFORMANCE	Data rate	Hz	2000	
	Range: Pitch	deg	±90	
	Range: Roll	deg	±180	
	Angular Resolution	deg	0.01	
	Static Accuracy, RMS	deg, 1σ	0.05	
	Dynamic Accuracy, RMS	deg, 1σ	0.08	
	Gyroscopes	**Units**		
	Measurement range	deg/sec	±2000	
	Bandwidth (-3dB)	Hz, 1σ	260	
	Data update rate	Hz	2000	
	Bias in-run stability (Allan Variance, RMS)	deg/hr, 1σ	2	
	Bias repeatability (turn-on to turn-on, RMS)	deg/hr, 1σ	20	
	Bias instability (over temperature range, RMS)	deg/hr, 1σ	72	
	SF accuracy (over temperature range)	ppm, 1σ	1000	
	Noise. Angular Random Walk (ARW)	deg/√hr, 1σ	0.38	
	Non-linearity	ppm, 1σ	350	
	Axis misalignment	mrad, 1σ	0.5	
	Accelerometers	**Units**		
	Measurement range	g	±8 / ±15 / ±40	
	Bandwidth (-3dB)	Hz, 1σ	260	
	Data update rate	Hz, 1σ	2000	
	Bias in-run stability (RMS, Allan Variance)	mg, 1σ	0.01 / 0.03 / 0.05	
	Bias instability (in temperature range, RMS)	mg, 1σ	0.7 / 1.1 / 1.5	
	Bias one-year repeatability	mg, 1σ	1.5 / 2.0 / 2.5	
	SF accuracy (over temperature range)	ppm, 1σ	500 / 700 / 850	
	SF one-year repeatability	ppm, 1σ	800 / 1400 / 1700	
	Noise. Velocity Random Walk (VRW)	m/sec/√hr, 1σ	0.02 / 0.045 / 0.06	
	Non-linearity	ppm, 1σ	340 / 800 / 1000	
	Axis misalignment	mrad, 1σ	0.5	
	Environment	**Units**		
ELECTRICAL & MECHANICAL	Mechanical shock (MIL-STD-810G)	g, msec	400 g, 0.1 ms	
	Vibration (MIL-STD-810G)	g RMS, Hz	8, 10 – 2000	
	Operating temperature	deg C	-40 to +85	
	Storage temperature	deg C	-50 to +90	
	Low pressure	Pa, min	1750, 30	
	Humidity	%	up to 95	
	MTBF (G_M @+65degC, operational)	hours	100,000	
	Life time (operational)	years	10	
	Life time (storage)	years	17	
	Electrical	**Units**		
	Supply voltage	V DC	4 to 15	
	Power consumption	Watts	0.365 @ 5V	
	Output Interface	-	RS-422	
	Output data format	-	Binary, ASCII (in GUI)	
	Physical	**Units**	**KERNEL-100**	**KERNEL-100-OEM**
	Size	mm	28.5 x 19.5 x 8.5	27.1 x 17 x 4.9
	Weight	grams	7	4

KERNEL-100 Mechanical and Electrical Interface Descriptions

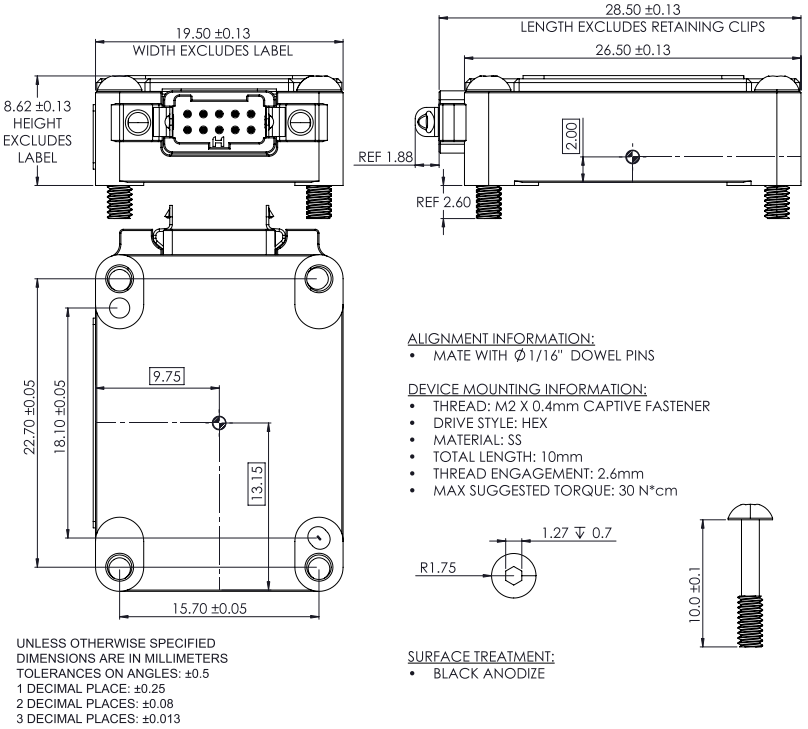


UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES ON ANGLES: ±0.5
1 DECIMAL PLACE: ±0.25
2 DECIMAL PLACES: ±0.08
3 DECIMAL PLACES: ±0.013

ALIGNMENT INFORMATION:
- MATE WITH Ø1/16" DOWEL PINS

DEVICE MOUNTING INFORMATION:
- THREAD: M2 X 0.4mm CAPTIVE FASTENER
- DRIVE STYLE: HEX
- MATERIAL: SS
- TOTAL LENGTH: 10mm
- THREAD ENGAGEMENT: 2.6mm
- MAX SUGGESTED TORQUE: 30 N*cm


SURFACE TREATMENT:
- BLACK ANODIZE

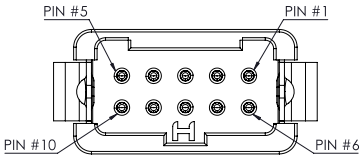


HARWIN G125 SERIES GECKO CONNECTOR

PIN	NAME	DESCRIPTION
1	POWER	POWER SUPPLY INPUT
2	BOOT	DO NOT CONNECT
3	1PPS	1PPS INPUT
4	RS422-A	RS-422 NON-INVERTING INPUT
5	RS422-B	RS-422 INVERTING INPUT
6	GROUND	POWER SUPPLY RETURN
7	TOV	TIME OF VALIDITY OUTPUT
8	EXTRIG	EXTERNAL TRIGGER INPUT
9	RS422-Y	RS-422 NON-INVERTING INPUT
10	RS422-Z	RS-422 INVERTING INPUT

KERNEL-100-OEM Mechanical Interface Description

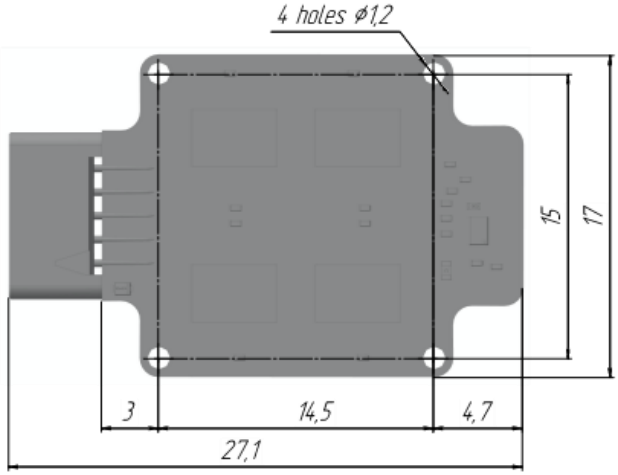

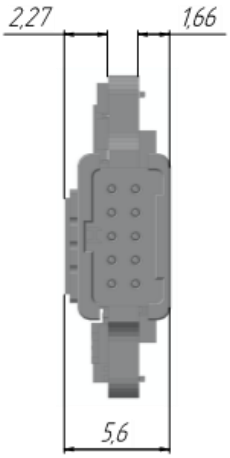

Note: Electrical interface is the same as defined above.



KERNEL-100 and KERNEL-100-OEM Product Code Structures

Model	Gyroscope	Accel	Calibration	Connector	Color	Version	Interface
KERNEL-100	G2000	A8	TGA	C12	B	V1	2
		A15		C22			
		A40		C42			

Model	Gyroscope	Accel	Calibration	Connector	Version	Interface
KERNEL-100-OEM	G2000	A8	TGA	C0	V1	2
		A15				
		A40				

Example:
KERNEL-100-OEM-G2000-A15-TGA-C0-V1.2
KERNEL-100-G2000-A15-TGA-C12-B-V1.2

Product code details:

- G2000: Gyroscopes measurement range = ±2000 deg/sec
- A8: Accelerometers measurement range = ±8 g
- A15: Accelerometers measurement range = ±15 g
- A40: Accelerometers measurement range = ±40 g
- TGA: Gyroscopes and Accelerometers are calibrated over temperature range
- C0: OEM version, mating option 2 (No screws included; reference mechanical drawing)
- C12: Aluminum case (with 12mm captive screws)
- C22: Aluminum case (no screws included)
- C42: Aluminum case (with 10.5mm captive screws)
- B: Color – Black
- V1: Version 1
- VX.2: RS-422 interface

DISCLAIMER:
The document is subject to change without notice. Inertial Labs reserves the right to make changes to any product or technology herein. Inertial Labs does not assume any liability arising out of the application or use of the product.
TRADEMARK LEGAL NOTICE:
All product names, logos, and brands are property of their respective owners. All company, product and service names used in this document are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.