



MEMS Inertial Measurement Unit Digital Tilt Sensor

KERNEL-100

Datasheet

The **Inertial Labs MEMS KERNEL Inertial Measurement Units & Digital Tilt Sensors** are the latest addition to the Inertial Labs Advanced Miniature MEMS sensor-based family. Revolutionary due to its very compact, self-contained strapdown, industrial-grade Inertial Measurement Systems that measures linear accelerations and angular rates with three-axis MEMS accelerometers and three-axis MEMS gyroscopes. Angular rates and accelerations are determined with low noise and very good repeatability for both motionless and dynamic applications.



The **Inertial Labs KERNEL-100** is the breakthrough, fully integrated inertial solution that combines the latest MEMS sensor technologies.

Fully calibrated, temperature compensated, mathematically aligned to an orthogonal coordinate system, the IMU contains up to 2 deg/hr Bias in-run stability gyroscopes and 0.01 mg Bias in-run stability accelerometers with very low noise and high reliability.

Continuous Built-in Test (BIT), configurable communications protocols and flexible input power requirements make the **Inertial Labs KERNEL** easy to use in a wide range of higher order integrated system applications.




The **Inertial Labs KERNEL** models were designed for applications, like:

- ❖ Autonomous vehicles
- ❖ Antenna and Line of Sight Stabilization Systems
- ❖ Passengers trains acceleration / deceleration and jerking systems
- ❖ Motion Reference Units (MRU) and Motion Control Sensors (MCS)
- ❖ Gimbals, EOC/IR, platforms orientation and stabilization
- ❖ GPS-Aided Inertial Navigation Systems (INS)
- ❖ Attitude and Heading Reference Systems (AHRS)
- ❖ Land vehicles navigation and motion analysis
- ❖ Buoy or Racing Boat Motion Monitoring
- ❖ UAV & AUV/ROV navigation and control


Parameter	KERNEL-100
GYROSCOPES	
Measurement range	±2000 deg/sec
Gyroscopes Bias in-run stability	2 deg/hr
Gyroscopes Bias instability (over temperature range)	72 deg/hr
Gyroscopes Noise - Angular Random Walk	0.38 deg/vhr
ACCELEROMETERS	
Measurement range	±8 g
Accelerometers Bias in-run stability	0.01 mg
Accelerometers Bias instability (over temperature range)	0.7 mg
Accelerometers Noise - Velocity Random Walk	0.02 m/sec/vhr

	Parameter	Units	KERNEL-100	
GENERAL	Output signals		Pitch, Roll, Accelerations, Angular Rates, Temperature, Synch	
	Color of Enclosure		Black	
	Update rate (IMU data)	Hz	2000	
	Update rate (Pitch & Roll data)	Hz	2000	
	Start-up time	sec	<0.02	
	Full Accuracy Data (Warm-up Time)	sec	<0.05	
	Latency	milli sec	<1	
PERFORMANCE	Pitch & Roll	Units		
	Data rate	Hz	2000	
	Range: Pitch	deg	±90	
	Range: Roll	deg	±180	
	Angular Resolution	deg	0.01	
	Static Accuracy, RMS	deg, 1σ	0.05	
	Dynamic Accuracy, RMS	deg, 1σ	0.08	
	Gyroscopes	Units		
	Measurement range	deg/sec	±2000	
	Bandwidth (-3dB)	Hz, 1σ	260	
	Data update rate	Hz	2000	
	Bias in-run stability (Allan Variance, RMS)	deg/hr, 1σ	2	
	Bias repeatability (turn-on to turn-on, RMS)	deg/hr, 1σ	20	
	Bias instability (over temperature range, RMS)	deg/hr, 1σ	72	
	SF accuracy (over temperature range)	ppm, 1σ	1000	
	Noise. Angular Random Walk (ARW)	deg/vhr, 1σ	0.38	
	Non-linearity	ppm, 1σ	350	
	Axis misalignment	mrad, 1σ	0.5	
	Accelerometers	Units		
	Measurement range	g	±8 / ±15 / ±40	
	Bandwidth (-3dB)	Hz, 1σ	260	
	Data update rate	Hz, 1σ	2000	
	Bias in-run stability (RMS, Allan Variance)	mg, 1σ	0.01 / 0.03 / 0.05	
	Bias instability (in temperature range, RMS)	mg, 1σ	0.7 / 1.1 / 1.5	
	Bias one-year repeatability	mg, 1σ	1.5 / 2.0 / 2.5	
	SF accuracy (over temperature range)	ppm, 1σ	500 / 700 / 850	
	SF one-year repeatability	ppm, 1σ	800 / 1400 / 1700	
	Noise. Velocity Random Walk (VRW)	m/sec/vhr, 1σ	0.02 / 0.045 / 0.06	
	Non-linearity	ppm, 1σ	340 / 800 / 1000	
	Axis misalignment	mrad, 1σ	0.5	
	Environment	Units		
ELECTRICAL & MECHANICAL	Mechanical shock (MIL-STD-810G)	g, msec	400 g, 0.1 ms	
	Vibration (MIL-STD-810G)	g RMS, Hz	8, 10 – 2000	
	Operating temperature	deg C	-40 to +85	
	Storage temperature	deg C	-50 to +90	
	Low pressure	Pa, min	1750, 30	
	Humidity	%	up to 95	
	MTBF (G _M @ +65degC, operational)	hours	100,000	
	Life time (operational)	years	10	
	Life time (storage)	years	17	
	Electrical	Units		
	Supply voltage	V DC	4 to 15	
	Power consumption	Watts	0.365 @ 5V	
	Output Interface	-	RS-422	
	Output data format	-	Binary, ASCII (in GUI)	
	Physical	Units	KERNEL-100	KERNEL-100-OEM
	Size	mm	28.5 x 19.5 x 8.5	27.1 x 17 x 4.9
	Weight	grams	7	4

KERNEL-100 Mechanical Interface Descriptions

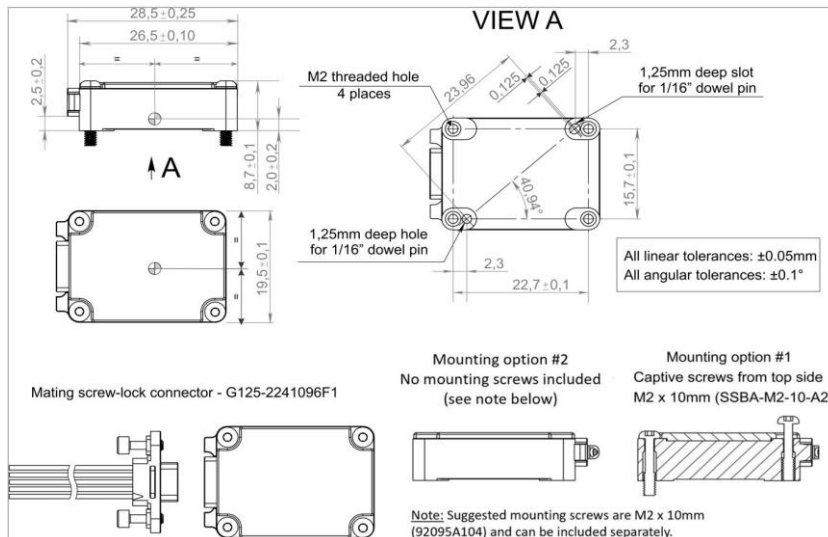


Electrical Interface Descriptions



1	POWER	Power Supply Input
2	RESERV	Reserved for future
3	RESERV	Reserved for future
4	RS422-A	RS-422 Non-Inverting Input
5	RS422-B	RS-422 Inverting Input
6	GROUND	Power Supply Return
7	TOV	Time of validity output (by request)
8	EXTRIG	External trigger input (by request)
9	RS422-Y	RS-422 Non-Inverting Output
10	RS422-Z	RS-422 Inverting Output

KERNEL-100-OEM Mechanical and Electrical Interfaces Descriptions

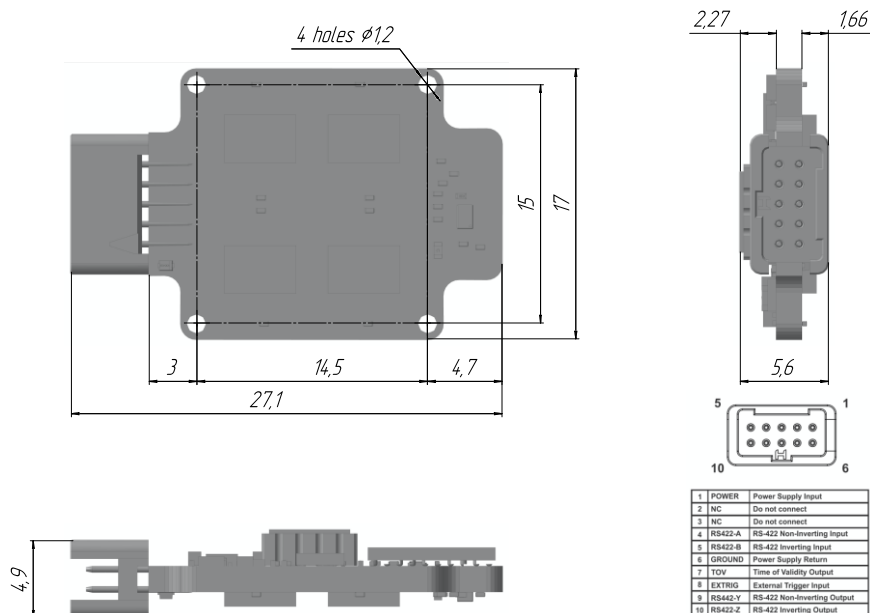

KERNEL-100 and KERNEL-100-OEM Part Numbers Description

Model	Gyroscope	Accel	Calibration	Connector	Color	Version	Interface
KERNEL-100	G2000	A8	TGA	C12	B	V1	2
		A15		C22			
		A40		C42			
Model	Gyroscope	Accel	Calibration	Connector	Version	Interface	
KERNEL-100-OEM	G2000	A8	TGA	C0	V1	2	
		A15					
		A40					

Example:

KERNEL-100-OEM-G2000-A15-TGA-C0-V1.2

KERNEL-100-G2000-A15-TGA-C12-B-V1.2

Product code details:

- G2000: Gyroscopes measurement range = ± 2000 deg/sec
- A8: Accelerometers measurement range = ± 8 g
- A15: Accelerometers measurement range = ± 15 g
- A40: Accelerometers measurement range = ± 40 g
- TGA: Gyroscopes and Accelerometers are calibrated over temperature range
- C0: OEM version, mating option 2 (No screws included; reference mechanical drawing)
- C12: Aluminum case (with 12mm captive screws)
- C22: Aluminum case (no screws included)
- C42: Aluminum case (with 10.5mm captive screws)
- B: Color – Black
- V1: Version 1
- VX.2: RS-422 interface

DISCLAIMER:

The document is subject to change without notice. Inertial Labs reserves the right to make changes to any product or technology herein. Inertial Labs does not assume any liability arising out of the application or use of the product.

TRADEMARK LEGAL NOTICE:

All product names, logos, and brands are property of their respective owners. All company, product and service names used in this document are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.