




Dual Antenna, GPS-Aided Inertial Navigation Systems INS-DU-OEM

INS-DU-OEM Specifications

	Parameter	Units	INS-DU-OEM		
General	Input signals		<ul style="list-style-type: none"> Marine application: DVL (Doppler Velocity Log) Land application: Odometer, Wheel sensor, Encoder, DMI Aerial application: Wind sensor, Air Speed Sensor, Doppler shift from locator (for long-term GPS denied) All: External Stand-Alone Magnetic Compass (SAMC/AHRS) 		
	Output signals		<ul style="list-style-type: none"> Horizontal and Vertical Positions, Heading, Pitch & Roll, Velocity, Accelerations, Angular rates, Barometric data, PPS Direct AT_ITINS message with Position, Heading, Pitch & Roll to COBHAM AVIATOR UAV 200 		
	Main features		Low Cost, Dual antenna Heading, 1 cm RTK position		
	Data rate (INS)	Hz	Up to 200 (user settable)		
	Data rate (IMU)	Hz	Up to 2000 (user settable)		
	Start-up time	sec	<1		
Navigation	Positions, Velocity and Timestamps		INS-DU-OEM		
	Horizontal position accuracy (SP, L1), RMS	meters	1.5		
	Horizontal position accuracy (SP, L1/L2), RMS	meters	1.2		
	Horizontal position accuracy (post processing) ⁽²⁾	meters	0.005		
	Horizontal position accuracy (RTK), RMS	meters	0.01 + 1 ppm CEP		
	Vertical position accuracy (SP), RMS	meters	<2		
	Vertical position accuracy (RTK), RMS	meters	0.02 + 1 ppm CEP		
	Velocity accuracy, RMS	meters/sec	0.05		
PPS timestamps accuracy	nano sec	20			
Orientation	Heading		INS-DU-OEM		
	Range	deg	0 to 360		
	Static Accuracy ⁽³⁾	deg RMS, 1 σ	0.2 (2m baseline); 0.4 (1m baseline)		
	Dynamic accuracy (GNSS) ⁽⁶⁾	deg RMS, 1 σ	0.2 (2m baseline); 0.4 (1m baseline)		
	Post processing accuracy ⁽²⁾	deg RMS, 1 σ	0.1		
	Pitch and Roll		INS-DU-OEM		
	Range: Pitch, Roll	Deg	$\pm 90, \pm 180$		
	Angular Resolution	Deg	0.01		
	Static Accuracy in whole Temperature Range	deg, 1 σ	0.05		
	Dynamic Accuracy ⁽⁶⁾	deg RMS, 1 σ	0.03		
Post processing accuracy ⁽²⁾	deg RMS, 1 σ	0.01			
GNSS receiver	GNSS receiver		INS-DU-OEM		
	Number of GNSS Antennas		Dual		
	Supported GNSS signals & corrections (optional)		GPS L1C/A L2C, GLO L1OF L2OF, GAL E1B/C E5b, BDS B1I B2I, QZSS L1C/A L2C SBAS L1C/A: WAAS, EGNOS, MSAS, GAGAN		
	Channel configuration ⁽⁴⁾		184 Channels – F9 Engine		
	GNSS Positions data rate ⁽⁵⁾	Hz	20, 25 ⁽⁶⁾		
	RTK corrections		RTCM 3		
	GNSS Measurements (raw) data rate	Hz	20		
	Velocity accuracy, RMS	meters/sec	0.05		
	Initialization time	Sec	<29 (cold start), <1 (hot start)		
	Time accuracy (clock drift) ⁽⁷⁾	nano sec	30		
IMU	Gyroscopes		INS-DU-OEM		
	Type		Industrial-grade		
	Measurement range	deg/sec	$\pm 450, \pm 950; \pm 1864$		
	Bias in-run stability (RMS, Allan Variance)	deg/hr, 1 σ	2		
	Bias instability after INS initialization (RMS)	deg/hr	10		
	Bias residual error over temperature range (RMS)	deg/hr, 1 σ	72		
	Angular Random Walk	deg/ $\sqrt{\text{hr}}$, 1 σ	0.38		
	Accelerometers		INS-DU-OEM		
	Type		Tactical-grade		
	Measurement range	g	± 8 g	± 15 g	± 40 g
	Bias in-run stability (RMS, Allan Variance)	mg, 1 σ	0.005	0.02	0.03
	Bias error over temperature range (RMS)	mg, 1 σ	0.5	0.7	1.2
	Bias one-year repeatability	mg, 1 σ	1.0	1.3	1.5
	Velocity Random Walk	m/s/ $\sqrt{\text{hr}}$, 1 σ	0.015	0.035	0.045
	Magnetometers		INS-DU-OEM		
	Measurement Rate	Gauss	± 8.0		
	Bias in-run stability (Allan Variance)	μGauss , 1 σ	8		
	Power Spectral Density	$\mu\text{Gauss}/\sqrt{\text{Hz}}$, 1 σ	15		
	SF Accuracy	%, 1 σ	0.05		
	Pressure		INS-DU-OEM		
Measurement Rate	hPa	300 – 1100			
Bias in-run stability (RMS, Allan Variance)	Pa	2			
Noise Density	Pa/ $\sqrt{\text{Hz}}$	0.8			
Electrical and Physical	Environment		INS-DU-OEM		
	Operating temperature	deg C	-40 to +85		
	Storage temperature	deg C	-50 to +90		
	MTBF	hours	55,500		
	Electrical		INS-DU-OEM		
	Supply voltage	V DC	9 - 34		
	Power consumption	Watts	5 (6 with data logger)		
	Output Interface (options)		RS-232 or RS-422, CAN Ethernet (optional)		
	Output data format		Binary, NMEA 0183 ASCII		
	Physical		INS-DU-OEM		
Size	mm	85.5 x 47.7 x 36.6			
Weight	gram	160			

⁽²⁾ RMS, incremental error growth from steady state accuracy. Post-processing results using third party software; ⁽³⁾ 2 meters base line between two GNSS antennas; ⁽⁴⁾ tracks up to 60 L1/L2 satellites;

⁽⁵⁾ 50 Hz while tracking up to 20 satellites. 20 Hz position update rate for Basic model of INS; ⁽⁶⁾ dynamic accuracy may depend on type of motion; ⁽⁷⁾ time accuracy does not include biases due to RF or antenna delay, ⁽⁸⁾ 20 (GPS+GLO+GAL+BDS or GPS+GLO+GAL) and 25 (GPS only or GPS+GAL/GLO/BDS), 1 σ specifications are manufactured to a controlled 3 σ standard.

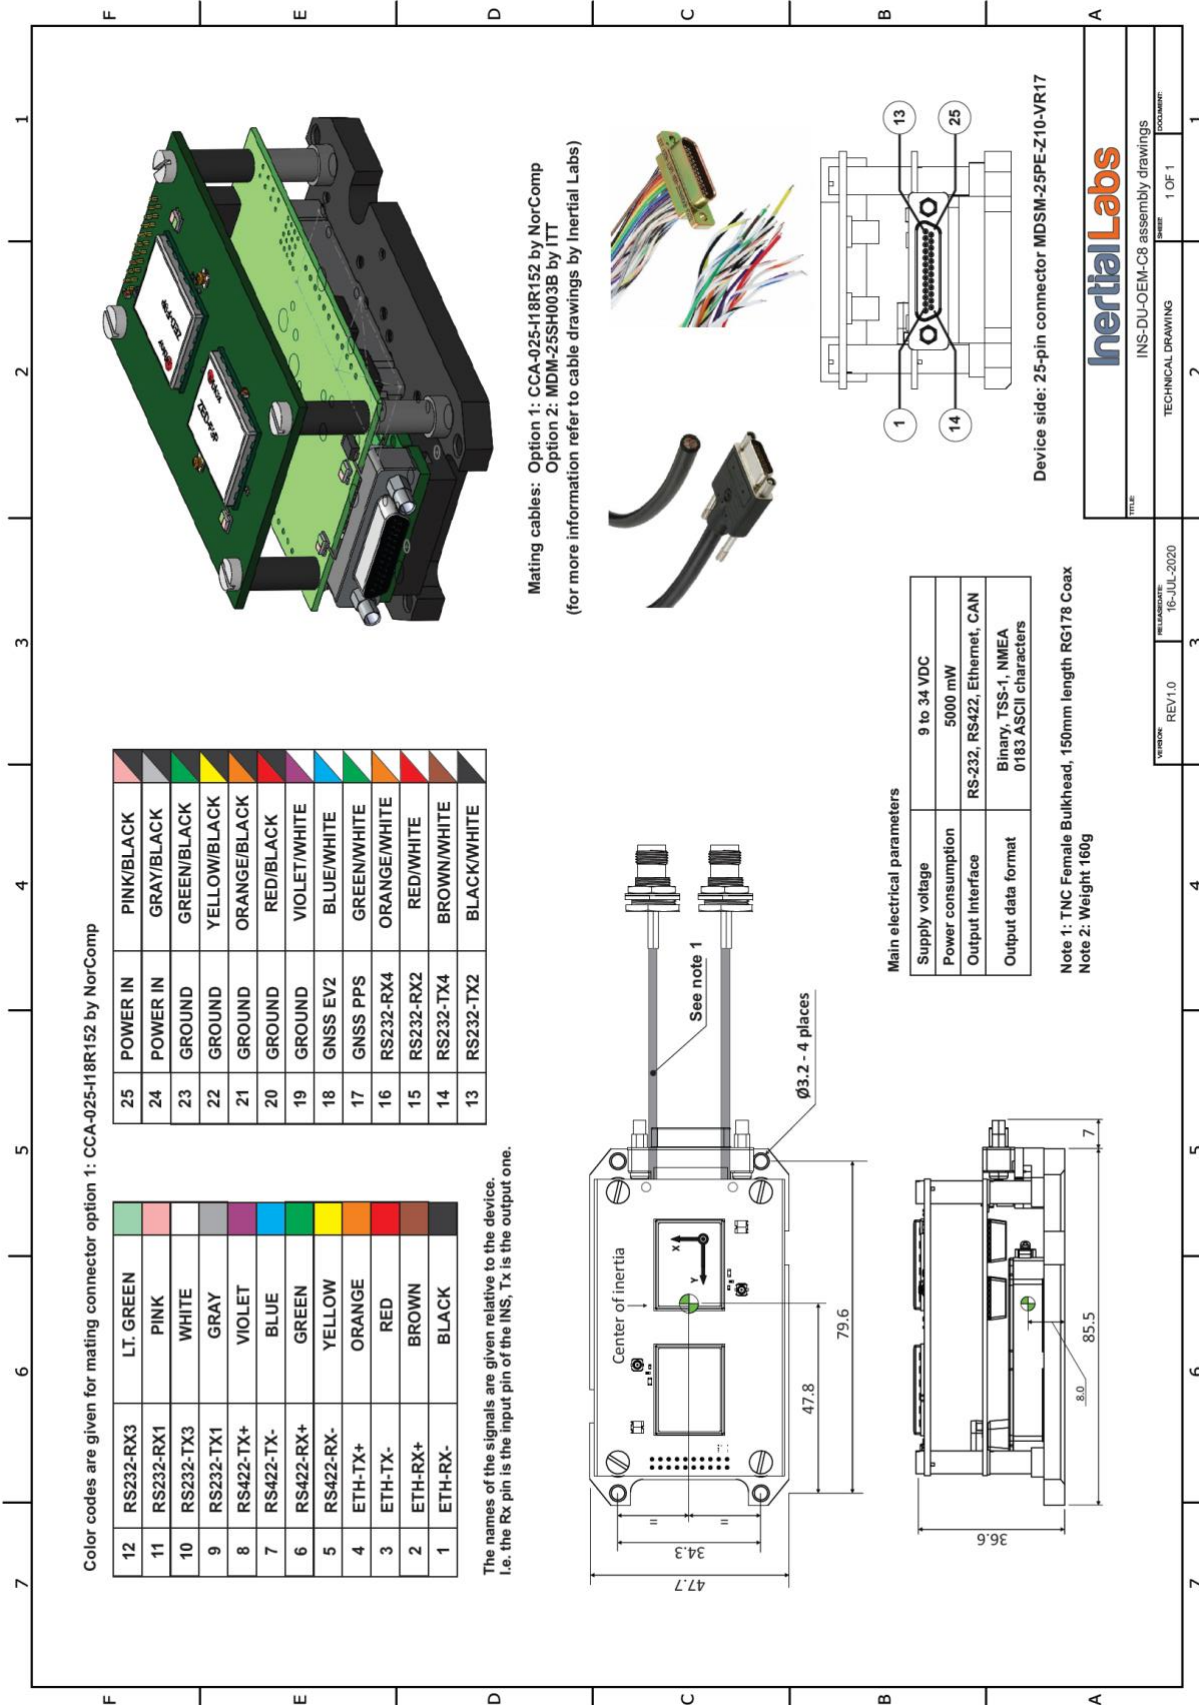

Product Code Structure:

Model	Gyroscope	Accel	Calibration	Connector	Encoder	Datalogger	GNSS receiver	Version	Interface	
INS-DU-OEM	G450	A8	TMGA	C4	E (option)	S64 (default)	ZD9P	VD9	1	
	G950	A15		C6					S8	2
	G1864	A40		C8						4
										5
										11
									22	
									145	
									245	

Example: INS-DU-OEM-G450-A15-TMGA-C6E-S64-ZD9P-VD9.1

- INS-DU-OEM: Low Cost Ublox Based GPS-Aided Inertial Navigation System Utilizing MiniAHRS
- G450: Gyroscopes measurement range = ± 450 deg/sec
- G950: Gyroscopes measurement range = ± 950 deg/sec
- G1864: Gyroscopes measurement range = ± 1864 deg/sec
- A8: Accelerometers measurement range = ± 8 g \rightarrow recommended for applications with low level of operational vibrations
- A15: Accelerometers measurement range ± 15 g \rightarrow recommended for applications with medium level of operational vibrations
- A40: Accelerometers measurement range ± 40 g \rightarrow recommended for high dynamic applications or/and with high level of vibration
- TMGA: Magnetometers, Gyroscopes and Accelerometers
- C4: Aluminum Base Plate - 26 pin header and ribbon cable (20021121-00026T4LF by Amphenol)
- C6: Aluminum Base Plate - 14 pin screw-lock connector (M80-5401442 by Harwin)
- C8: Aluminum Base Plate - 25 pin enclosed cable with screw lock connector (CCA-025-I36R152 by NorComp)
- E: Encoder support
- S8: 8GB embedded Data Logger (optional)
- S64: 64GB embedded Data Logger (optional)
- ZD9P: Dual UBlox ZED-F9P GNSS Receivers
- VD9: GPS L1/L2, GLO L1/L2, BDS B1/B2, GAL E1/E5, QZSS L1/L5, SBAS, RTK, Dual GNSS Heading, 20 Hz measurements, 20 Hz positions
- VX.1: RS-232 interface
- VX.2: RS-422 interface
- VX.4: CAN interface
- VX.5: Ethernet interface
- VX.11: two RS-232 interfaces
- VX.22: two RS-422 interfaces
- VX.145: RS-232, CAN and Ethernet interfaces (with optional Encoder support)
- VX.245: RS-422, CAN and Ethernet interfaces (without Encoder support)